SPECIFICATION CONTROL DRAWING

55A6359

TITI E

WIRE, ELECTRIC, RADIATION-CROSSLINKED, MODIFIED ETFE, LIGHTWEIGHT, GENERAL PURPOSE, 600 VOLT

Date 3-18-05

vision

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

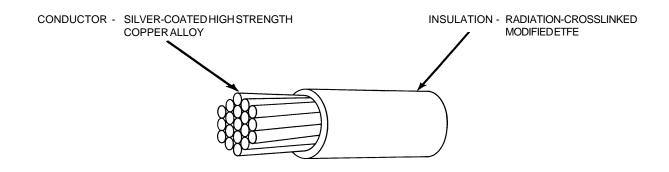


TABLE I. CONSTRUCTION DETAILS									
PARTNUMBER <u>1</u> /	WIRE SIZE (AWG)	CONDUCTOR STRANDING (number x AWG)	DIAMETER OF STRANDED CONDUCTOR (in.)		FINISHEDWIRE				
					MAXIMUM RESISTANCE AT 20°c	DIAMETER (in.)	MAXIMUM WEIGHT (lbs/1000 ft.)		
		(MINIMUM	MAXIMUM	(ohms/1000 ft)	,	(105/1000 11.)		
55A6359-28-*	28	7 x 36	.014	.016	74.4	.027 ± .002	.91		
55A6359-26-*	26	19 x 38	.018	.020	44.8	$.032 \pm .002$	1.4		
55A6359-24-*	24	19 x 36	.023	.025	28.4	.037 ± .002	2.0		
55A6359-22-*	22	19 x 34	.029	.031	17.5	.043 ± .002	2.9		
55A6359-20-*	20	19 x 32	.037	.039	10.7	.051 ± .003	4.4		
55A6359-18-*	18	19 x 30	.046	.050	6.7	.061 ± .003	6.7		
55A6359-16-*	16	19 x 29	.052	.057	5.2	.069 ± .003	8.6		

TABLE II. PERFORMANCE DETAILS								
PARTNUMBER 1/	BENDTESTING							
	MANDRELD (inch)	DIAMETER (± 3%)	WEIGHT (lb) (± 3%)					
	IMMERSION, LIFE CYCLE AND ACCELERATED AGING	COLD BEND	IMMERSION, LIFE CYCLE AND ACCELERATED AGING	COLD BEND				
55A6359-28-*	.250	.375	.125	.500				
55A6359-26-*	.375	.500	.125	.500				
55A6359-24-*	.375	.500	.250	1.00				
55A6359-22-*	.500	.750	.375	1.00				
55A6359-20-*	.500	.750	.500	1.00				
55A6359-18-*	.500	1.00	.500	1.00				
55A6359-16-*	.750	1.00	.750	1.00				

WIRE RATINGS AND ADDITIONAL REQUIREMENTS

INSULATION ELONGATION: 125% (minimum) for AWG 28 150% (minimum) for AWG 26-16

Except as specified above, this construction shall meet all the requirements of Raychem Specification Sheet 55A0114 for AWG sizes 26-16.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.

Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buye

1/COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Page 1 of 1

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



Raychem Wire & Cable 501 Oakside Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax:1-650-361-6297